



WATCHMAN[®]
Your Virtual Security Guard

WXP model

WIEGAND EXPANSION PANEL
4 Door Controller

by cellgate

Expanded Wiegand Functionality for all Watchman Models

WXP



Part Numbers

AAWX-VZN
AAWX-ATT
AAWX-INT



Key Features

- Supports 4 doors or gates
- Cellular or internet models available
- Verizon or AT&T LTE service, ships with both SIM cards
no VoIP fees required
- Compatible with any 26-bit Wiegand reader; CellGate readers available
cypress converter required for Transcore readers
- Restricted credential profiles
- Integrates with any Watchman product through TrueCloud Connect™

powered by:




Part Number:
CB-WIM-2000
1 Wiegand Expansion Board per door/gate
1 Wiegand, 2 inputs, 2 relays
**Each WXP requires a minimum of 1 CB-WIM-2000
**One board per entry point

WXP Expand Your Watchman Application Options



Management, Control and Flexibility
of all Access Devices

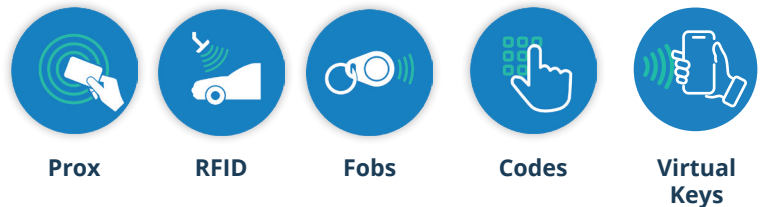

cellgate TOTAL PROPERTY WIRELESS ACCESS



1.855.694.2837

cell-gate.com



WATCHMAN®
Your Virtual Security Guard

WXP model

WIEGAND EXPANSION PANEL
4 Door Controller

by **cellgate**

CR Readers & Credentials

Universal Specs: All four readers are 12V DC, 26-bit Wiegand compatible, IP65-rated.



CR-INFINITY-HID

- QR Code Reader
- Bluetooth 5.0
- Backlit Keypad



CR-INFINITY

- QR Code Reader
- Bluetooth 5.0
- Encrypted 13.56MHz, DESFire® EV3
- Backlit Keypad



CR-READER

- Bluetooth 5.0
- Encrypted 13.56MHz, DESFire® EV3



CR-KEYPAD

- Encrypted 13.56MHz, DESFire® EV3
- Backlit Keypad




Software Integrations **REALPAGE** **YARDI**

... CONNECTING ...



- Fully integrated solutions ecosystem
- The engine that manages all product hardware, data transport, CellGate app(s) and user administration
- Single login for multiple properties
- Administrative privileges for multiple user tiers

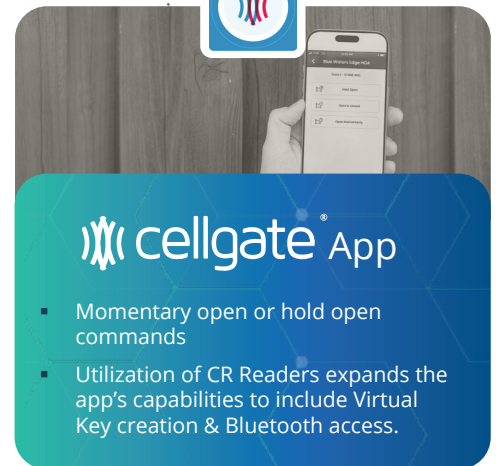

cellgate App

- Momentary open or hold open commands
- Utilization of CR Readers expands the app's capabilities to include Virtual Key creation & Bluetooth access.

Apps Available on the App Store and Google Play



Specifications

- Up to 4 Wiegand inputs per system
- 8 configurable (NO/NC) relays
- 8 digital inputs for monitoring and triggering relays or cameras
- 10,000 local codes and 65,000 non-local access codes total (4-5 digit codes)
- NEMA 3 steel electronics enclosure: 15"x12"x6"
- Operating temperature: -20°C - 55°C -4°F - 131°F
- Power (12v DC) 5 Amp transformer/power supply
- Integrates with any CellGate product through TrueCloud Connect™



cellgate | TOTAL PROPERTY WIRELESS ACCESS



1.855.694.2837

cell-gate.com